

Application and Maintenance for Window Decorations

This is the decoration with the white protective tape.


SystemText/SystemLogo

General information

This bulletin gives specific instructions for the application and maintenance of Window Decorations.



Clean the surface on which the text or logo is to be mounted with an agent which dissolves silicone, wax and grease (never use alcohol). Please refer to "How to degrease".

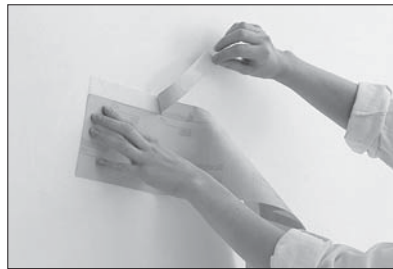


Tear off the uppermost strip on the backing paper.




Place the text/logo in the desired position using the adhesive edge, which is now exposed. It can be repositioned if necessary. Long texts can be split by cutting up to the adhesive edge between the letters.



Flip up the text/logo and remove the remainder of the backing paper. The adhesive edge now functions as a hinge.

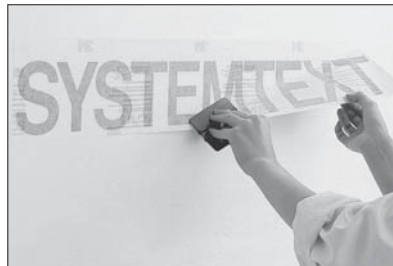

Scrape the text/logo on using the scraper. Begin at the top and hold the text/logo away from the surface.

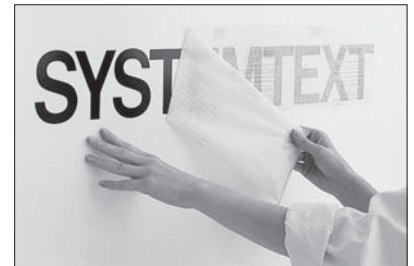

Remove the white protective tape gently and at an angle of 180°. Remember to rescraper all edges.

Before you start....

- Read the instructions in full before erection/mounting.
- SystemText/SystemLogo can be fixed onto any clean, smooth surface which is free of wax and grease. Please refer to 'How to degrease'.
- For most foils, the recommended minimum temperature for fixing should be 4°C. Use of A3 activator is recommended at lower temperatures.
- As we have no influence on whether SystemText/SystemLogo is mounted correctly, our guarantee is limited to replacing the product if it proves defective.
- If you are in any doubt, please contact our orders office, which can provide assistance with specific information sheets for individual foils.

How to degrease...

1. Vehicle paint:
Benzine or silicone and wax degreaser
2. Glass:
Isopropyl alcohol or A3 activator
3. Unfinished aluminium:
Benzine
4. Tarpaulin foils:
Isopropyl alcohol or A3 activator
5. PVC foam:
Isopropyl alcohol or A3 activator or benzine. PVC foam may vary in quality. Apply with care, making sure that the solvent does not dull the surface.
6. Acrylics:
Isopropyl alcohol or A3 activator
7. Polyethylene/Polypropylene:
Isopropyl alcohol or A3 activator.

When cleaning at high pressure...

Guidelines for washing vehicle decoration with a high-pressure cleaner.

- The pressure must not exceed 100 PSI
- The distance from the nozzle to the decoration must be at least 70 cm
- The water temperature should not exceed 50°C
- The angle between the nozzle and the decoration should be 90° (perpendicular)
- Clean from the centre of the decoration out to the edges
- It is vital that the vehicle is not washed until at least 72 hours after mounting.